


DIGITAL FUEL METERS




Rotatable register for desired flow direction

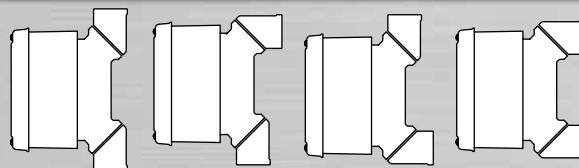



Side View: Rotate fittings for desired mounting

Inlet/outlet fittings allow for versatile mounting positions



DR 5-30

- Preprogrammed for seven different units of measure: Barrels (42 g), Imperial Gallons, Litres, Ounces, Pints, Quarts and US Gallons
- Front panel access to batch reset and field calibration
- Provides an open collector signal to customer supplied remote device
- Contact GPI® for special order units: Cubic Centimeters, Cubic Feet and Cubic Meters
- **For use with:** Gasoline, diesel fuel and kerosene. **Do not use with water or chemicals.**

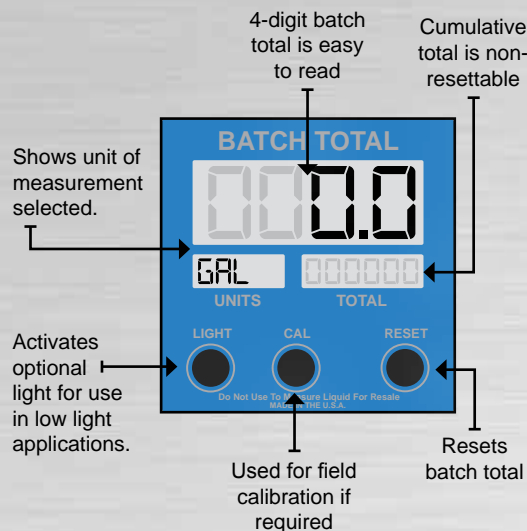

ORDERING INFORMATION

Model	Part No.	Thread
DR 5-30-6N	126300-11	¾ in. NPT
DR 5-30-6B	126300-14	¾ in. BSPP
DR 5-30-8N	126300-12	1 in. NPT
DR 5-30-8B	126300-15	1 in. BSPP
DR 5-30-12N	126300-13	1-½ in. NPT
DR 5-30-12B	126300-16	1-½ in. BSPP



DR 5-30

DR 5-30 SPECIFICATIONS

Construction	Aluminum
Type	Nutating Disc
Flow Range (GPM / LPM)	5 to 30 / 19 to 114
Powered By	Four AA Energizer® Lithium Batteries
Accuracy	+/- 2.00% Factory Calibration +/- 1.00% Field Calibration
Pressure Rating	50 PSI (3.4 bar)
Field Calibration	Yes
Certifications	U.L. 913: Intrinsically Safe for Class I, Division 1, Group D U.L. 25: Meters for Flammable and Combustible Liquids (NPT only. Does not apply to BSPP thread.)
Warranty	2 Year