
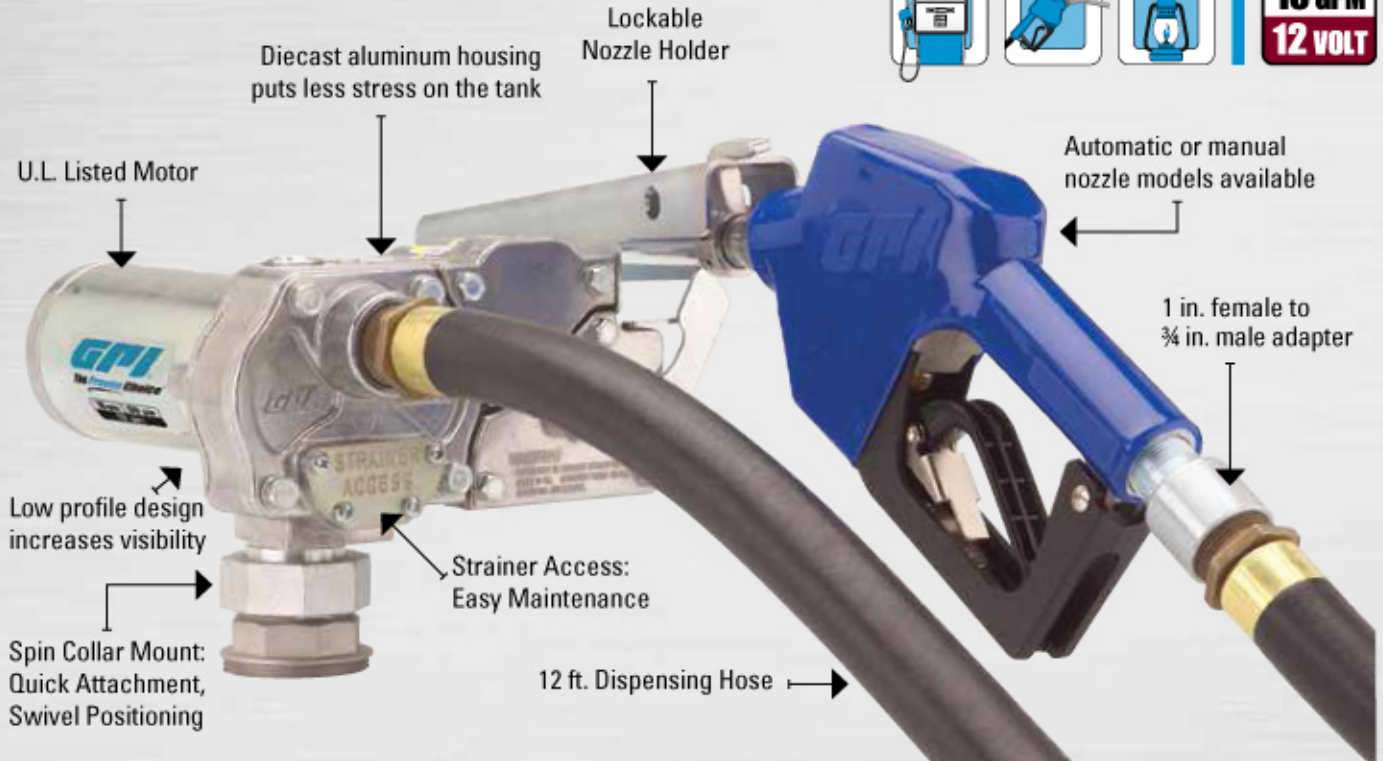


# FUEL TRANSFER PUMPS

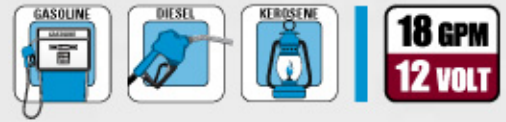

## M-180S

Designed for agriculture, automotive and construction applications

- 18 GPM flowrate, used to fill equipment faster in mobile application
- Spin collar design for versatile, end user preferred mounting positions
- Extremely long life and trouble-free operation
- Cast aluminum construction
- Low profile design for increased visibility when used on mobile tanks in pickup trucks
- Circuit breaker motor protection
- Tank adapter included

### M-150S SPECIFICATIONS

Flowrate (GPM / LPM)	18 / 69
Voltage	12-volt DC
Type	Rotary Gear
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) 12/2 AWG
Inlet / Outlet Size	1 in. / 1 in.
Dispensing Hose	12 ft. (3.7 m) x 1 in.
Suction Pipe	Telescoping to 40 in.
Mount	Spin Collar
Nozzle Holder	Lockable
Warranty	2 Year



### ORDERING INFORMATION

Model	Part No.	Nozzle	Suction Pipe	Hose	Certifications
M-180S-AU	110300-2	Automatic	Telescoping	12 ft.	
M-180S-ML	110300-1	Manual	Telescoping	12 ft.	UL LISTED MOTOR SF
M-180S-PO	110300-7	None	None	None	
M-180S-AU	110300-4	Automatic	Telescoping	12 ft.	UL LISTED MOTOR SF CE
M-180S-ML	110300-3	Manual	Telescoping	12 ft.	UL LISTED MOTOR SF CE