


FUEL TRANSFER PUMPS

15 GPM
24 VOLT

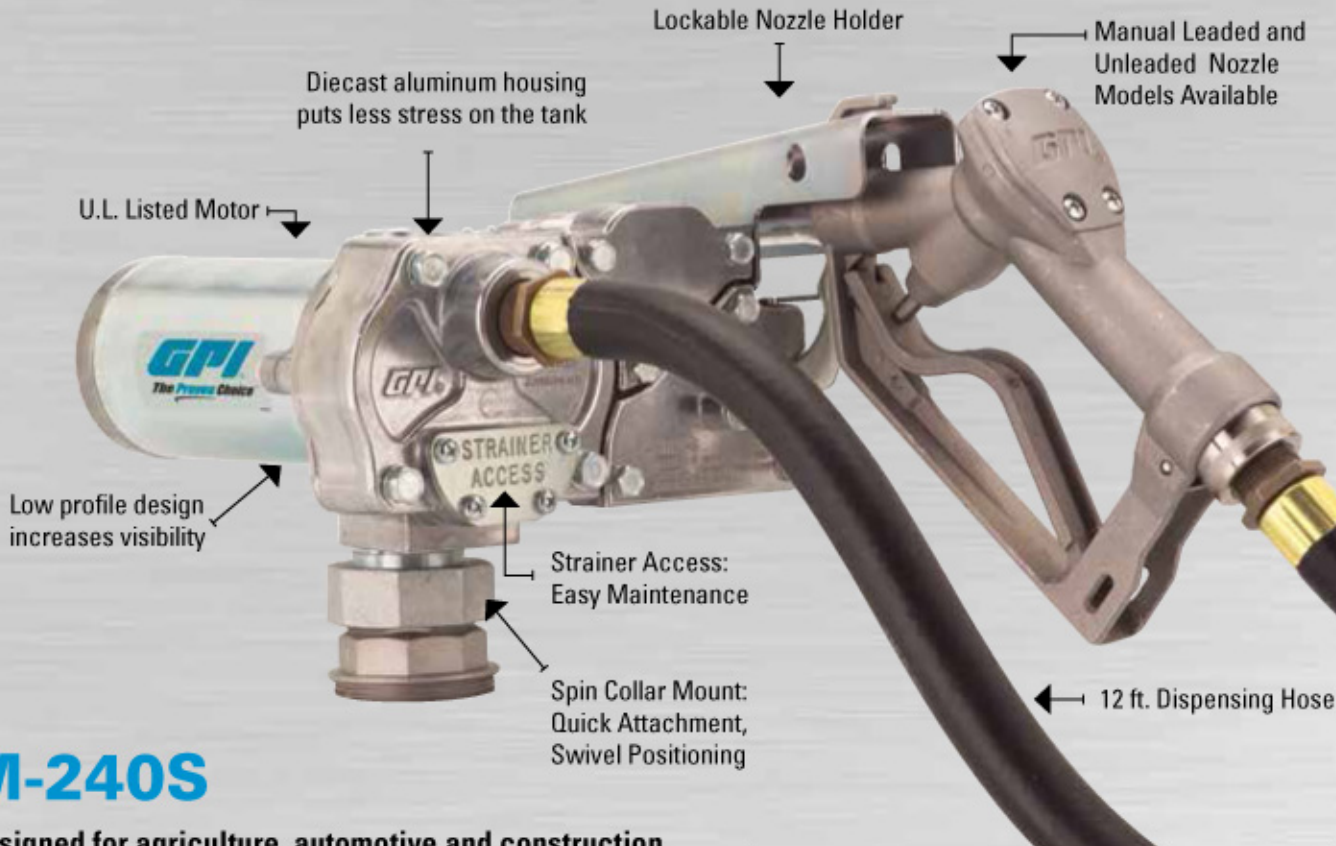

M-240S

Designed for agriculture, automotive and construction applications

- 15 GPM flowrate, empties 100 gallon mobile tanks in approximately 7 minutes
- Spin collar design offers versatile mounting positions and includes tank adapter for easy installation
- Extremely long life and trouble-free operation
- Cast aluminum construction
- Low profile design for increased visibility when used on mobile tanks in pickup trucks
- Circuit breaker motor protection
- Tank adapter included

M-240S SPECIFICATIONS	
Flowrate (GPM / LPM)	15 / 57
Voltage	24-volt DC
Type	Rotary Gear
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) 12/2 AWG
Inlet / Outlet Size	1 in. / 3/4 in.
Dispensing Hose	12 ft. (3.7 m) x 3/4 in.
Suction Pipe	Telescoping to 40 in.
Mount	Spin Collar
Nozzle Holder	Lockable
Warranty	2 Year

ORDERING INFORMATION		
Model	Part No.	Certifications
M-240S-MU	110000-70	UL LISTED MOTOR SF
M-240S-ML	110000-91	UL LISTED MOTOR SF CE

