


FUEL TRANSFER PUMPS

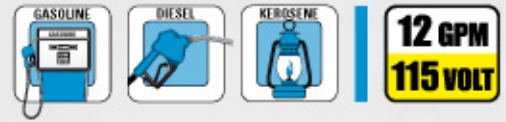

M-1115S

Designed for stationary locations in fleet, agriculture or industrial applications.

- Spin collar design for versatile end user preferred mounting positions
- Extremely long life and trouble-free operation
- Cast aluminum construction
- Internal auxiliary temperature limiting device and circuit breaker motor protection
- Tank adapter included

ORDERING INFORMATION		
Model	Part No.	Nozzle
M-1115S-AU	110000-82	Automatic
M-1115S-MU	110000-81	Manual

M-1115S SPECIFICATIONS	
Flowrate (GPM / LPM)	12 / 45
Voltage	115-volt AC
Type	Rotary Gear
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 in. / 3/4 in
Dispensing Hose	12 ft. (3.7 m) x 3/4 in.
Suction Pipe	Telescoping to 40 in.
Mount	Spin Collar
Nozzle Holder	Lockable
Certifications	UL LISTED SP
Warranty	2 Year

M-1115S-AU



M-1115S-MU

