


# FUEL TRANSFER SYSTEMS

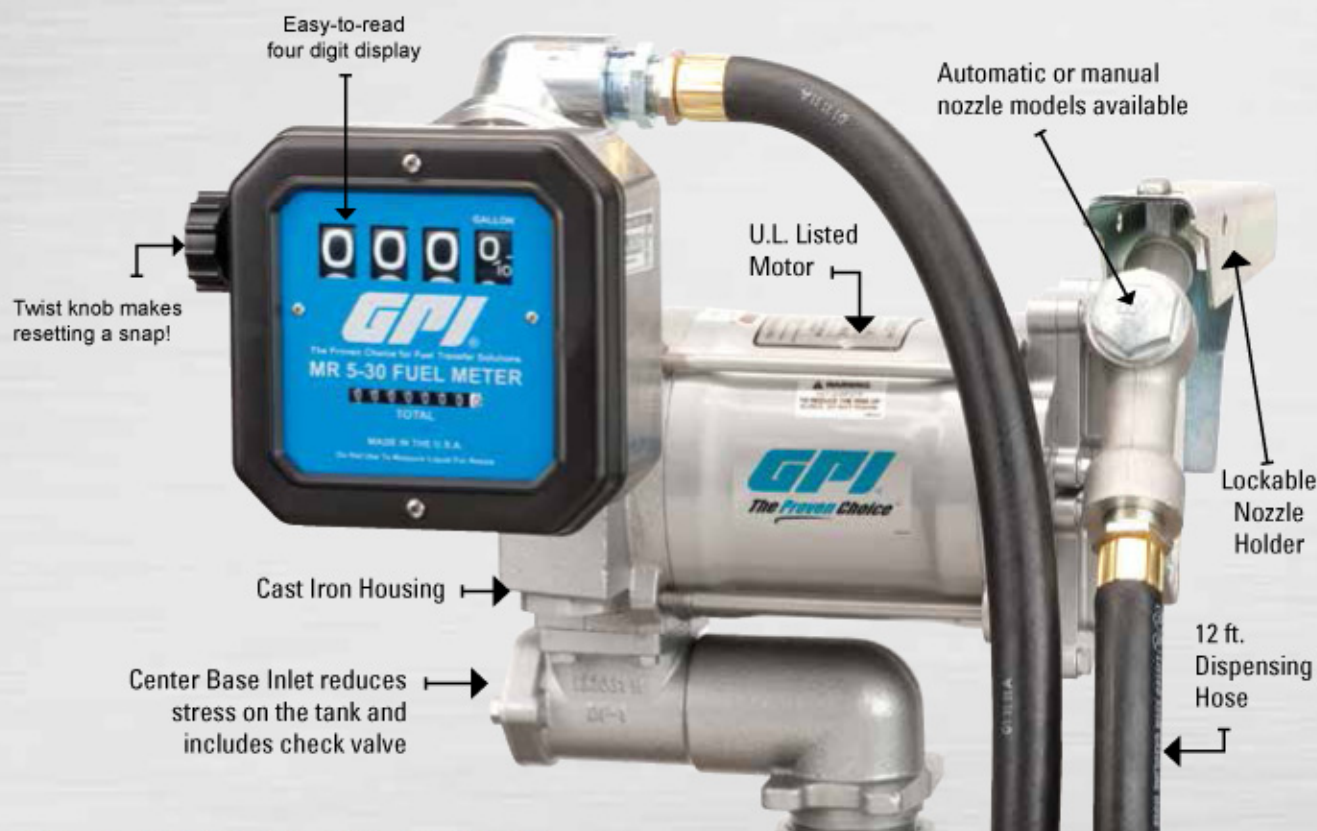

## M-3120 & M-3130 Combos

**Designed for Stationary Tank Applications where high flow and long life are desired**

- Factory assembled GPI Combos are available with the M-3120 or M-3130 pump and include the MR 5-30 meter. Meter is calibrated in gallons or litres.
- Internal auxiliary temperature limiting device motor protection
- Weight centering inlet base includes pressure relief and easy strainer access
- Field-replaceable switch and vanes
- Tank adapter included

SPECIFICATIONS	M-3120 / MR 5-30	M-3130 / MR 5-30
Flowrate (GPM / LPM)	20 / 76	30 / 114
Voltage	115-volt AC	115- or 230-volt AC
Type	Carbon Vane	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.	30 min. / 30 min.
Inlet / Outlet Size	1 in. / 1 in.	1 1/4 in. / 1 in.
Dispensing Hose	12 ft. (3.7 m) x 3/4 in.	12 ft. (3.7 m) x 1 in.
Certifications		
Warranty	2 Year	2 Year